




Forged Closed Spelter Wire Rope Socket

- YOKE Spelter Sockets are forged from special bar quality carbon steel with the finest hardness control and when properly applied have an efficiency rating of 100% based on the catalogue strength of wire rope.
- Socket size 1/4" through 3/4" use one groove, 7/8" through 1-1/2" use 2 grooves.
- Closed Spelter Sockets meet the performance requirements of Federal Specification RR-S-550E. Type B.

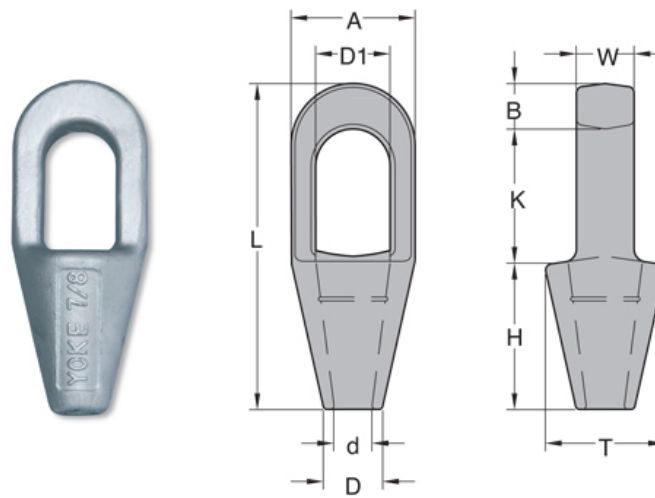

Specifications

Part Code	Rope Dia. mm	Structural Strand Dia. mm	A mm	B mm	D mm	D1 mm	d mm	H mm	K mm	L mm	T mm	W mm	Mass kg
8-735-G06	6-7	—	38	13	18	22	11	57	44	114	38	13	0.3
8-735-G10	8-10	—	43	16	21	25	13	57	51	124	43	18	0.4
8-735-G13	11-13	—	51	18	25	30	14	64	57	138	50	22	0.7
8-735-G16	14-16	13	67	21	28	36	18	76	64	160	63	25	1.2
8-735-G19	18-20	14-16	76	27	32	41	21	89	76	192	70	32	2.0
8-735-G22	22-23	18-20	92	32	38	48	24	101	89	222	88	38	3.6
8-735-G26	24-26	22-23	104	35	45	58	29	114	102	251	96	45	4.9
8-735-G28	28-30	24-25	114	38	51	65	32	127	114	279	105	50	7.2
8-735-G36	32-35	26-28	135	41	57	71	38	140	127	308	121	57	10.5
8-735-G38	36-39	30-32	135	49	70	81	41	152	152	354	133	64	14.3

Specifications

Part Code	Rope Dia. inch	Structural Strand Dia. inch	A inch	B inch	D inch	D1 inch	d inch	H inch	K inch	L inch	T inch	W inch	Mass kg
8-735-G06	1/4	—	1.50	0.50	0.71	0.88	0.43	2.25	1.73	4.50	1.50	0.50	0.7
8-735-G10	5/16 - 3/8	—	1.69	0.62	0.83	0.98	0.50	2.25	2.00	4.88	1.70	0.71	0.9
8-735-G13	7/16 - 1/2	—	2.00	0.71	0.98	1.19	0.55	2.52	2.25	5.43	1.96	0.87	1.5
8-735-G16	9/16 - 5/8	1/2	2.63	0.83	1.12	1.41	0.71	3.00	2.52	6.31	2.50	0.98	2.6
8-735-G19	3/4	9/16 - 5/8	3.00	1.06	1.26	1.61	0.81	3.50	3.00	7.58	2.75	1.26	4.4

