


Closed Spelter Sockets

Quenched and tempered cast steel

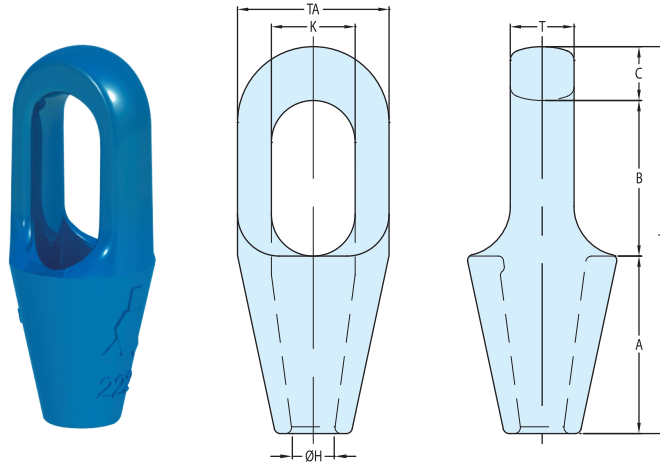

Model nr.	MBL (Mtons)	for wire Ø		Strand Ø		Dimensions (mm)								Weight (kg)
		mm	inch	mm	inch	A	B	C	ØH	K	T	TA	TL	
CSS 296	8	6-7	1/4	-	-	50	40	11	9	22	13	37	101	0,3
CSS 297	12	8-10	3/8	-	-	57	48	14	13	25	18	43	119	0,4
CSS 298	20	11-13	7/16 - 1/2	-	-	64	59	17,5	15	30	23	51	140	0,7
CSS 299	25	14-16	9/16 - 5/8	13	1/2	76	65	21	18	36	26	67	162	1,4
CSS 200	40	18-19	3/4	14-16	9/16 - 5/8	89	78	27	22	42	32	76	194	2,2
CSS 201	55	20-22	7/8	18-19	3/4	101	90	33	25	47	38	92	224	3,8
CSS 204	75	23-26	1	20-22	7/8	114	103	36	29	57	44	104	253	5,4
CSS 207	90	27-30	1 1/8	23-26	1	127	116	39	33	65	51	114	282	7
CSS 212	125	31-36	1 1/4 - 1 3/8	27-28	1 1/16 - 1 1/8	139	130	43	39	71	57	126	312	10
CSS 215	150	37-39	1 1/2	30-32	1 3/16 - 1 1/4	152	155	51	42	81	63	136	358	13
CSS 217	170	40-42	1 5/8	33-35	1 5/16 - 1 3/8	165	171	54	45	83	70	146	390	17
CSS 219	225	43-48	1 3/4 - 1 7/8	36-40	1 7/16 - 1 5/8	190	198	55	52	93	76	171	443	26
CSS 222	280	49-54	2 - 2 1/8	42-45	1 5/8 - 1 3/4	216	224	62	59	100	82	193	502	37
CSS 224	360	55-60	2 1/4 - 2 3/8	46-48	1 13/16 - 1 7/8	228	247	73	64	112	92	216	548	50
CSS 226	425	61-68	2 1/2 - 2 5/8	50-54	2 - 2 1/8	248	270	79	75	140	102	241	597	66
CSS 227	460	69-75	2 3/4 - 2 7/8	56-62	2 1/4 - 2 1/2	279	286	79	81	159	124	273	644	91
CSS 228	560	76-80	3 - 3 1/8	64-67	2 1/2 - 2 5/8	315	298	83	88	171	133	292	696	117
CSS 229	625	81-86	3 1/4 - 3 3/8	69-76	2 3/4 - 3	330	311	102	92	184	146	311	743	125
CSS 230	720	87-93	3 1/2 - 3 5/8	78-86	3 1/16 - 3 3/8	356	330	102	99	197	159	330	788	176
CSS 231	875	94-102	3 3/4 - 4	88-96	3 7/16 - 3 3/4	381	356	108	108	216	178	362	845	228
CSS 233	1200	108-115	4 1/4 - 4 1/2	98-110	3 7/8 - 4 5/16	450	425	125	129	235	190	405	1000	323
CSS 240	1400	120-130	4 3/4 - 5	112-124	4 7/16 - 4 7/8	500	525	125	147	260	200	450	1150	447
CSS 245	1600	135-140	5 1/4 - 5 1/2	125-132	4 15/16 - 5 3/16	540	495	150	157	290	220	520	1185	645
CSS 250	2000	142-153	5 3/4 - 6	133-143	5 1/4 - 5 5/8	585	530	170	171	305	240	545	1285	741
CSS 255	2220	154-165	6 1/4 - 6 1/2	144-154	5 11/16 - 6 1/4	630	565	175	185	330	250	575	1370	860
CSS 260	2500	166-178	6 3/4 - 7	155-166	6 1/4 - 6 3/4	680	590	180	199	330	270	595	1450	985
CSS 265	2800	180-191	7 1/4 - 7 1/2	167-179	6 9/16 - 7 1/16	725	620	190	213	350	290	625	1535	1183
CSS 270	3200	192-204	7 3/4 - 8	180-191	7 1/4 - 7 1/2	775	650	210	229	395	305	690	1635	1487

MBL = Minimum Breaking Load

The standard finish of our sockets is blue. Hot dipped galvanized is also available. Socket range CSS 296 until CSS 201 is delivered with galvanized finish, other finishes are available upon request. All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable. Dimensional tolerances depend on the manufacturing techniques applied and are different between machined components (pins) and cast components (socket bodies and wedges). Also surface finish e.g. hot dip galvanizing or even paint may add to the overall thickness and fork distance. Please contact Ropeblock for further guidance and a detailed dimensional tolerance sheet.